

Safe solution for sheet handling



No need to compromise


www.piab.com



Extra large suction cups with optimum flexibility

Flat mounting plate facilitates customized threaded interface

Standard interface for bar mounting, extra accessory port for quick part release and vacuum sensing

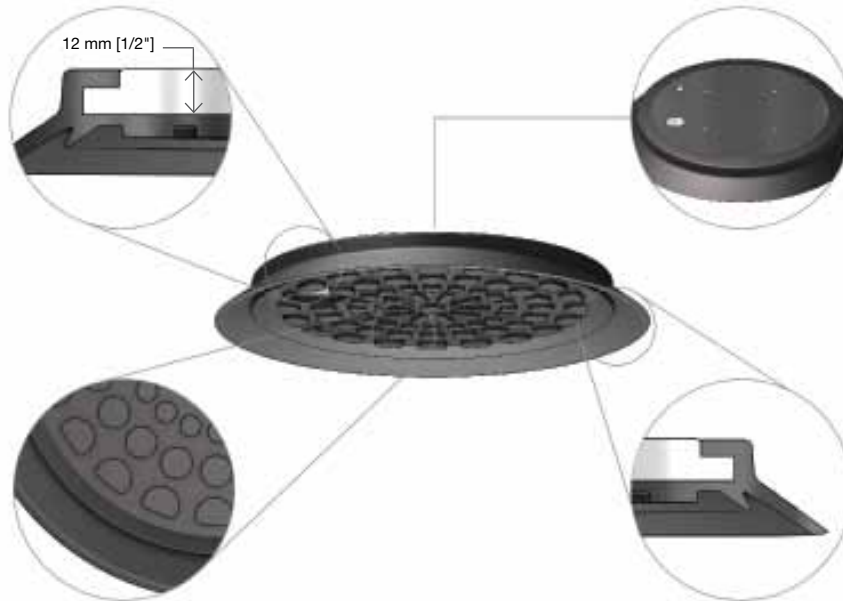

Special friction pattern withstands high shear forces during vertical handling

Outer and Inner lip – increases safety in case of tear or overload

Technical table

Description	Outer Diameter* (mm)	Lifting force**, N at -90kPa		Mounting interface (mm)	Weight (g)	Temperature range (°C)	Article number
		Vertical	Parallel				
XLF 150	Ø 153	780 / 1130	663	G1/2, center	362	0-90	0127131
XLF 200	Ø 204	1720 / 2200	1462	4x M6, 70x70	792	0-90	0127132
XLF 250	Ø 250	2870 / 3540	2440	4x M6, 70x70	1280	0-90	0127133
XLF 300	Ø 304	4630 / 5450	3936	4x M8, 82x82	2035	0-90	0127134

* All cups are 27 mm in height

** Inner / Outer lip

The hardness is 60° Shore A and the connection is a standard G 1/2" female

No need to compromise

www.piab.com