


# dBred F10-C

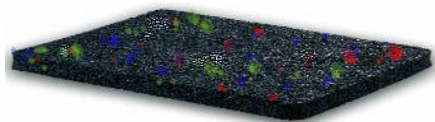

ELASTIC MAT FOR IMPACT SOUND INSULATION

**Composition:** selected SBR rubber bound with polyurethane resins (MDI) and PUR granules

**Color:** black rubber and colored PUR pigments

**Application fields:** under screed

**Thickness:** mm 10


<b>Packaging:</b>	<b>Panel dimensions</b>	<b>Quantity per panel</b>	<b>Panels per pallet</b>	<b>Quantity per pallet</b>	<b>Pallet weight</b>
	cm 230x115	m <sup>2</sup> 2,64	n 47	m <sup>2</sup> 124,31	Kg 940

**Application warnings:** see "Application's methods and Critical Details" and/or consult the dBred Technical Department

<b>Technical characteristics:</b>				
	Specific weight	Kg/m <sup>3</sup>	~600 > 720	
	Square meter weight	Kg/m <sup>2</sup>	~7,00	
	Tensile strength	N/mm <sup>2</sup>	~0,65	DIN 53571
	Elongation at break	%	~68	DIN 53571
	Stress at 30 % compression	N/mm <sup>2</sup>	~0,90	DIN 53577
	Stress at 20 % compression	N/mm <sup>2</sup>	~0,4	DIN 53577
	Temperature resistance	°C	-40 up to +115	
	Fire resistance		Class B2	DIN 4102

All the indications provided in this technical data sheet are purely approximate and not binding for legal purposes. The data listed has been gathered from laboratory tests and it hence follows that in practical applications on buildings sites the final characteristics of the products may be subject to substantial variations depending on the meteorological conditions and the installations. The user must always check suitability of the product for its specific use, undertaking all liability implicit in and deriving from use of the product, as well as comply with all the methods and instructions for use generally referable to "workmanlike" execution. Edilteco S.p.A. reserves the right to change the contents of this technical data sheets on its final judgements. The spreading of this data sheet through any media, supersedes and cancels the validity of any other technical data sheet previously published.

AZIENDA CON SISTEMA DI  
GESTIONE PER LA QUALITÀ  
CERTIFICATO DA DNV  
= UNI EN ISO 9001:2000 =



dBredF10-C\_2009-09-14.ENG.doc

